

1500SPF

特 征

- 大容量 1500V-500A 尺寸来实现
- 通过使用铜条而更易于配线的方形类型
- 标准装备有熔断显示功能
- 可选择安装微动开关

额 定

额定电压・分断容量：AC1500V-100KA
最小分断电流：AC1500V-额定电流的10倍
最大起弧电压：3000V


规 格

标准规格品

Type	额定电流 (A)	熔断 ¹² t (×10 ³ A ² S)	全分断 ¹² t (×10 ³ A ² S) at AC1500V-100KA	功率损耗 (W)	尺寸(mm)					质量 (g)	Fig	通过 标准
					A	B	C	D	M			
1500SPF50S	50	0.5	3.4	11	A1=30 A2=43	103	27	50	M8 Depth 8	370		
1500SPF75S	75	1.0	6.8	20						51		105
1500SPF100S	100	2.0	13.5	29								
1500SPF150S	150	4.0	27.0	40								
1500SPF200S	200	7.9	54.0	63	60	105	43	66	M10 Depth 10	1100		
1500SPF250S	250	12.4	111.0	67								
1500SPF300S	300	15.7	149.0	80								
1500SPF350S	350	23.4	216.0	95								
1500SPF400S	400	27.8	255.0	105	75	105	51	75	M12 Depth 12	1700		
1500SPF450S	450	37.9	325.0	120								
1500SPF500S	500	49.5	396.0	140								

外形尺寸


Fig 1

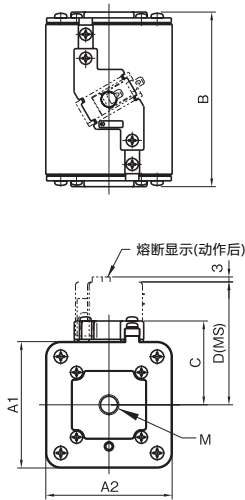


注 意

- 请在参考末尾的“为了安全使用”“PROTECT FUSE 使用指南”进行使用。
- 熔断显示的最小工作电压为10V。


熔断特性

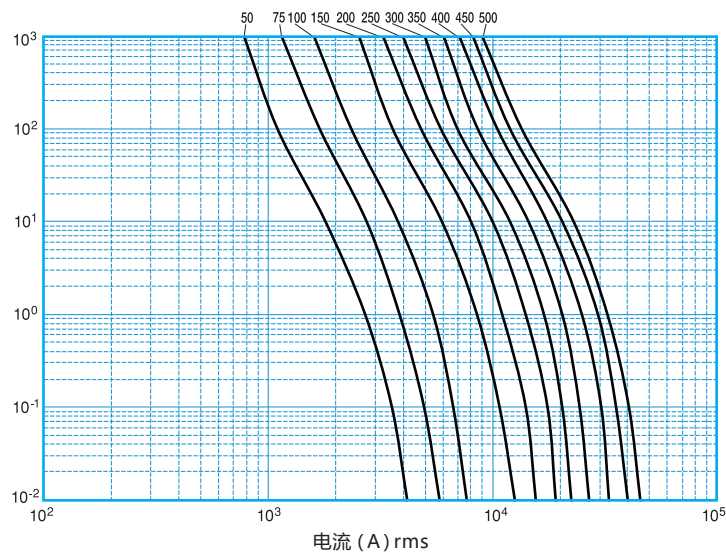


限流特性

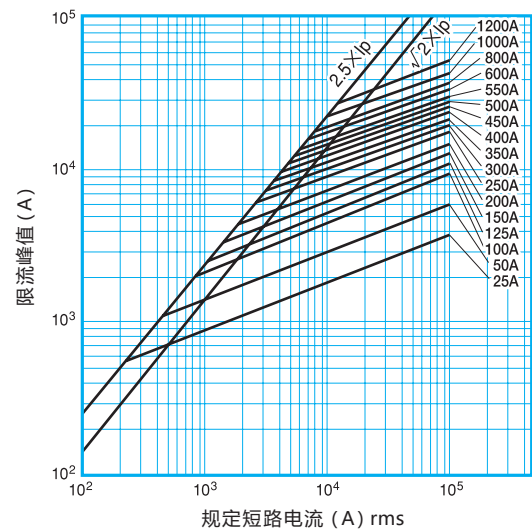


温度上升

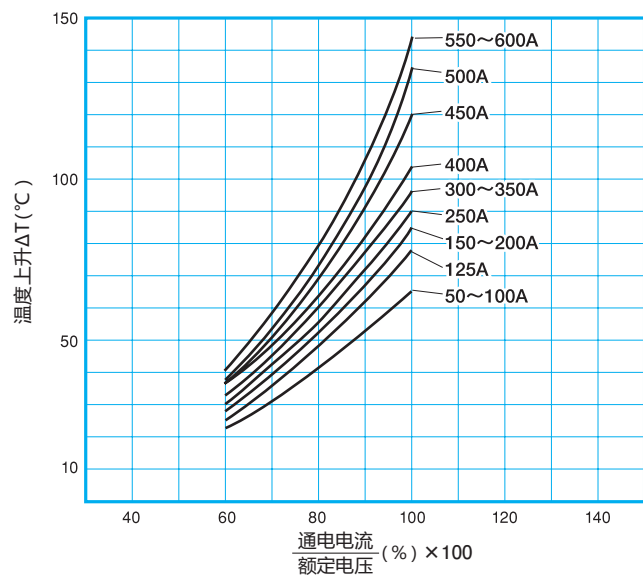

功率损耗

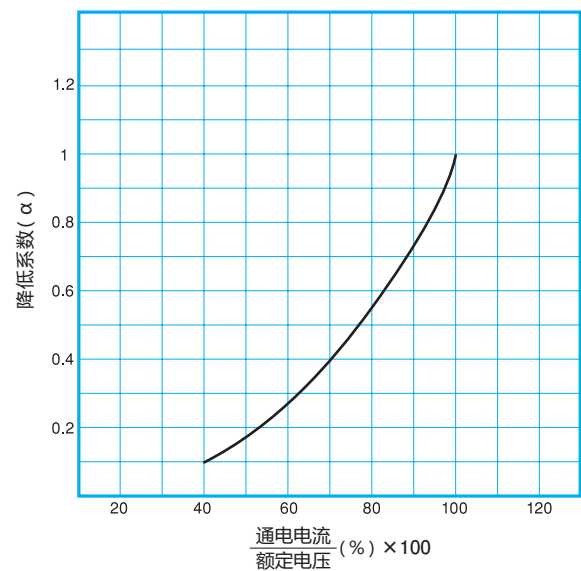

交流工作电压全分断 I^2t

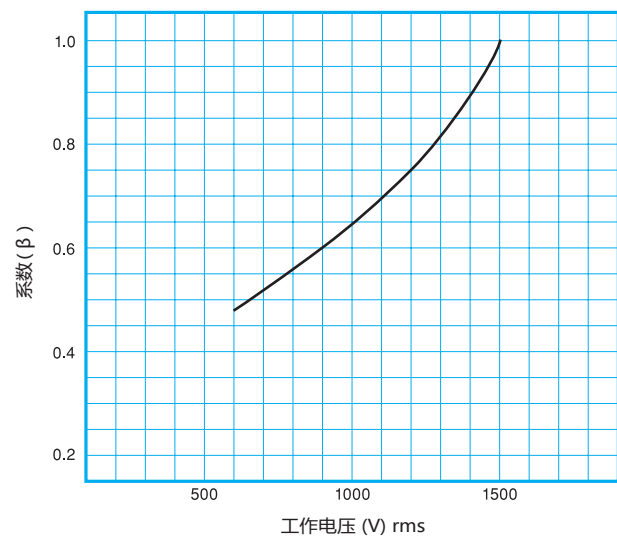

直流电路应用

