

F25P SERIES


250V 500V 700V AC, DC

- 定格電圧 250V AC/350V DC ● 定格電流 30~600A
- しや断容量 250V/350V-100KA AC, DC (L/R 10mS)
- Voltage Rating 250V AC/350V DC ● Current Rating 30~600A
- Breaking Capacity 250V/350V-100KA AC, DC (L/R 10mS)



◆外形図 : Outline Dimensional Drawings (m/m)

fig 1

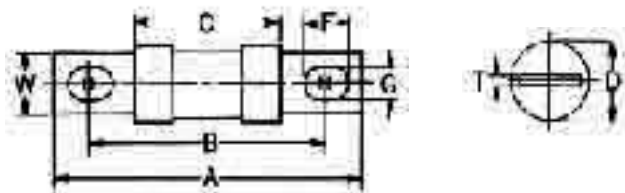


◆仕様/Specifications

Type	定格電流 Ampere Rating	溶断 I^2t Pre-arc I^2t (A ² S)	全しや断 I^2t Total I^2t (A ² S) at 250V-100KA	外形寸法 Dimensions (m/m)								重量 g	パツ pcs	Fig
				A	B	C	D	T	F	G	W			
F25P-30	30A	50	350	82	62	42	20	2.5	11	8.5	18			1
F25P-40	40A	90	650											
F25P-50	50A	150	1,100											
F25P-60	60A	220	1,600											
F25P-70	70A	300	2,000	82	62	27	23	3	15	8.5	18	75	10	1
F25P-75	75A	350	2,400											
F25P-80	80A	450	3,000											
F25P-100	100A	600	4,000											
F25P-125	125A	1,000	6,500	98	73	38	37	5	14	11	25			1
F25P-150	150A	1,700	9,500											
F25P-175	175A	2,300	13,000											
F25P-200	200A	3,000	18,000											
F25P-225	225A	3,600	22,000	98	73	38	37	5	14	11	25			1
F25P-250	250A	4,700	28,000											
F25P-300	300A	7,200	42,000											
F25P-350	350A	11,000	55,000											
F25P-400	400A	14,500	85,000	102	72	38	45	6	14	11	30			1
F25P-450	450A	17,000	100,000											

端子変更における寸法変更

◎溶断時間-電流特性曲線 (Time Current curve)

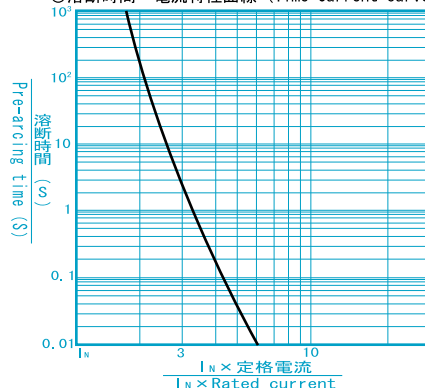

F50P SERIES


500V AC, DC

- 定格電圧 500V AC, DC ● 定格電流 20~500A
- しや断容量 500V-100KA AC, DC (L/R 10mS)
- Voltage Rating 500V AC, DC ● Current Rating 20~500A
- Breaking Capacity 500V-100KA AC, DC (L/R 10mS)

◆仕様/Specifications

Type	定格電流 Ampere Rating	溶断 I^2t Pre-arc I^2t (A ² S)	全しや断 I^2t Total I^2t (A ² S) at 500V-100KA	外形寸法 Dimensions (m/m)								重量 g	パツ pcs	Fig
				A	B	C	D	T	F	G	W			
F50P-20	20A	20	190	82	62	43	20	2.5	11	8.5	18			1
F50P-30	30A	60	480											
F50P-35	35A	85	680											
F50P-40	40A	120	900											
F50P-45	45A	150	1,200	96	72	44	24	3	11	8.5	18			1
F50P-50	50A	200	1,500											
F50P-60	60A	250	1,800											
F50P-70	70A	330	2,500											
F50P-80	80A	500	3,600	105	81	45	37	5	14	11	25			1
F50P-90	90A	620	4,500											
F50P-100	100A	750	5,300											
F50P-125	125A	1,300	8,500											
F50P-150	150A	2,100	12,800	105	81	45	37	5	14	11	25			1
F50P-175	175A	3,000	19,600											
F50P-200	200A	4,600	26,500											
F50P-250	250A	6,200	49,000											
F50P-300	300A	11,000	76,000	105	81	45	37	5	14	11	25			1
F50P-350	350A	16,000	110,000											
F50P-400	400A	21,000	140,000											

◎溶断時間-電流特性曲線 (Time Current curve)

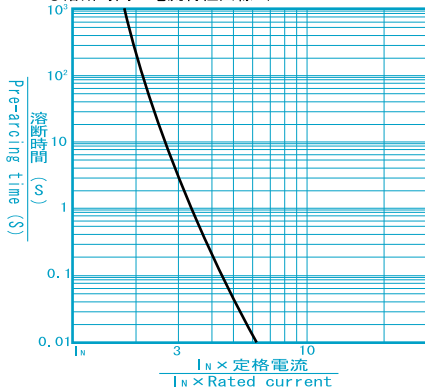

F70P SERIES

700V AC, DC

- 定格電圧 700V AC, DC ● 定格電流 35~400A
- しや断容量 700V-100KA AC, DC (L/R 10mS)
- Voltage Rating 700V AC, DC ● Current Rating 35~400A
- Breaking Capacity 700V-100KA AC, DC (L/R 10mS)

◆仕様/Specifications

Type	定格電流 Ampere Rating	溶断 I^2t Pre-arc I^2t (A ² S)	全しや断 I^2t Total I^2t (A ² S) at 700V-100KA	外形寸法 Dimensions (m/m)								重量 g	パツ pcs	Fig
				A	B	C	D	T	F	G	W			
F70P-35	35A	90	800	114	92	43	20	2.5	11	8.5	18			1
F70P-40	40A	120	1,100											
F70P-50	50A	190	1,750											
F70P-60	60A	260	2,500											
F70P-70	70A	420	3,600	112	92	44	23	3	11	8.5	18			1
F70P-80	80A	510	4,600											
F70P-90	90A	650	6,000											
F70P-100	100A	910	7,500											
F70P-125	125A	1,700	15,300	125	102	45	37	5	14	11	25			1
F70P-150	150A	2,400	20,000											
F70P-175	175A	3,500	30,000											
F70P-200	200A	4,700	42,000											
F70P-250	250A	7,600	69,000	129	102	45	45	6	14	11	30			1
F70P-300	300A	12,000	127,000											
F70P-350	350A	16,500	180,000											

◎溶断時間-電流特性曲線 (Time Current curve)

